




# WINSTON / ROYAL GUARD CORPORATION

## Coalescing Cartridge with “ET” Top Cap for easy cartridge removal

### W--L536Rb-ET Series (0.3 micron rating)

FOR TYPE 140 GAS LIQUID  
COALESCERS

The W--L536Rb-ET series gas-liquid coalescing cartridges with the “ET” top cap are designed with personnel safety in mind allowing easy removal and replacement from the top area of the open coalescer vessel. The dual purpose top cap is ideal for securing the cartridge in place and easy removal with the extractor tool. These cartridges are provided in either a pleated media or a depth media and offer excellent coalescing properties with maximum removal of liquid and solid particles 0.3 micron and larger from gas or air.

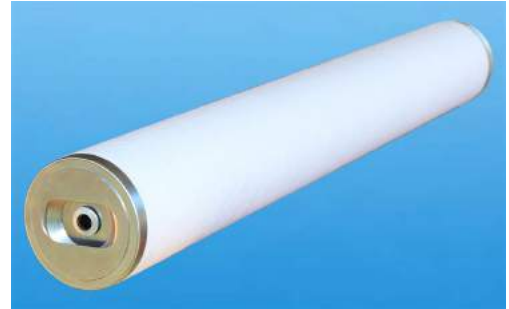

Contaminants removed include liquid hydrocarbons, water, amine, glycol, and extremely fine solid particulate matter. Applications include recovery of compressor lube oil, glycol and amine mist carryover, fine solid particulate matter and contaminant protection for equipment, catalyst beds and other critical applications in gas production, transportation, and processing industries.

For maximum efficiency these cartridges are rated to either:

- Microglass with pleated media: beta 5000 (99.98% removal of liquid and solid particles 0.3 micron and larger).
- Microglass depth with graded density media: beta 1000 (99.9% removal of liquid and solid particles 0.3 micron and larger).
- Polypropylene with pleated media: beta 1000 (99.9% removal of liquid and solid particles 0.3 micron and larger) for gas applications with trace amounts of amine.

#### **BENEFITS:**

- Increased personnel safety with easy cartridge removal with the extractor tool from the top area of the open coalescer vessel.
- Maximum protection for processes, equipment, and catalysts.
- Recovers carried-over liquids such as lube oil, amine, and glycol.
- Improves operational performance.
- Strong support cores can withstand differential pressure to 75 psi.

#### **OPERATION SPECIFICATIONS:**

- Flow direction is inside to outside.
- 0.3 micron rating.
- Recommended differential pressure for cartridge change-out is 15 PSI.

**W--L536Rb-ET Series  
Coalescing Cartridge  
(0.3 micron rating)**

...continued from page 1



**“ET” Top Cap**



**Lock Risers installed  
on cartridges**

**FEATURES:**

- Perforated support cores inside and outside help prevent collapse in upset conditions.
- Polyester outer wrap surrounds the pleated media to assist in drainage of the coalesced liquids.
- End caps, cores, and support materials are available in tinned steel, galvanized steel, 304 or 316 stainless steel, and synthetic materials.
- Buna gasket on the open end is standard. Also available in Viton, silicone, EPDM, or PTFE. Use Viton for amine applications where an abundance of hydrocarbons are present, otherwise EPDM may be used.

**STANDARD DIMENSIONS:** 36” Long -- 5 ½” O.D. (other sizes can be furnished).

**STANDARD PART NUMBERS AND BETA RATINGS:**

**WPML536Rb5-ET** (beta 5000) with **microglass** high-efficiency pleated media:

- Maximum operating temperature.... 275° F.
- Minimum operating temperature.....35° F.

**WMGL536Rb1-ET** (beta 1000) with **microglass** high-efficiency depth media:

- Maximum operating temperature.... 275° F.
- Minimum operating temperature.....35° F.

**WPPL536Rb1-ET** (beta 1000) with **polypropylene** high-efficiency pleated media for gas applications with trace amounts of amine:

- Maximum operating temperature.... 180° F.
- Minimum operating temperature.....35° F.

Specifications are subject to change without notice. 3-20-2019

**WINSTON / ROYAL GUARD CORPORATION**

P. O. Box 1145 • White Oak, Texas 75693 USA  
Phone (800) 527-8465 • (903) 757-7341 • Fax (903) 759-6986  
Winston-RoyalGuard.com • e-mail: sales@winston-royalguard.com  
Copyright © 2019 Winston/Royal Guard Corporation. All rights reserved